




FIRE HYDRANT INSTALLATION ASSEMBLY
NOT TO SCALE
TOWN OF PITTSBORO
STANDARD CONSTRUCTION DETAIL
STANDARD NO. 6

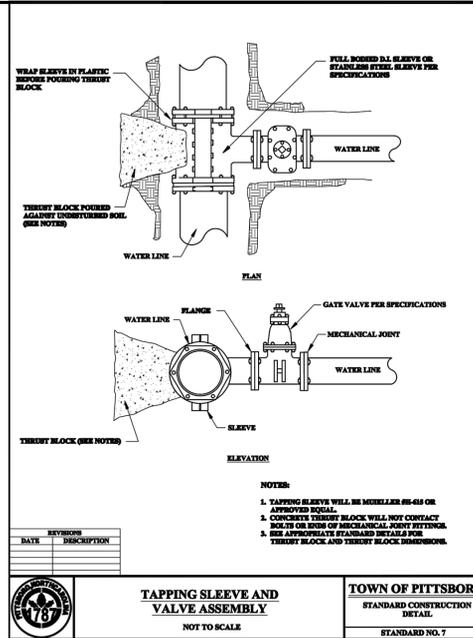


TAPPING SLEEVE AND VALVE ASSEMBLY
NOT TO SCALE
TOWN OF PITTSBORO
STANDARD CONSTRUCTION DETAIL
STANDARD NO. 7

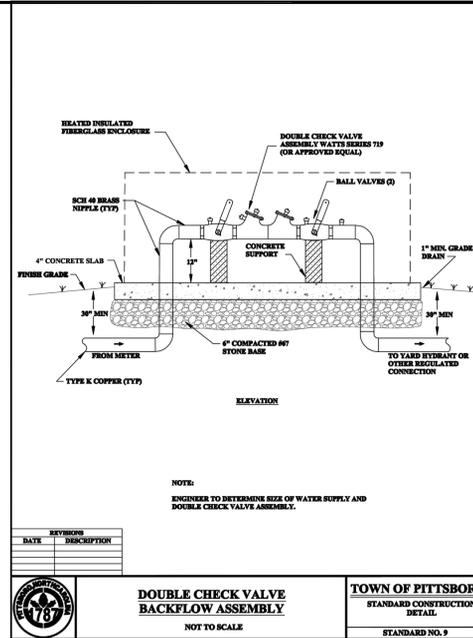


DOUBLE CHECK VALVE BACKFLOW ASSEMBLY
NOT TO SCALE
TOWN OF PITTSBORO
STANDARD CONSTRUCTION DETAIL
STANDARD NO. 9

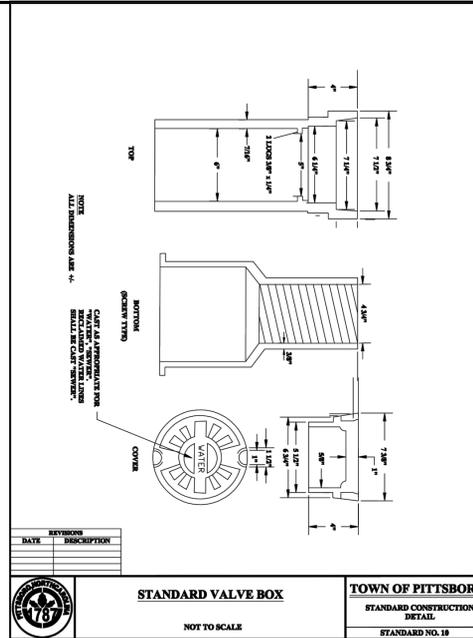


STANDARD VALVE BOX
NOT TO SCALE
TOWN OF PITTSBORO
STANDARD CONSTRUCTION DETAIL
STANDARD NO. 10

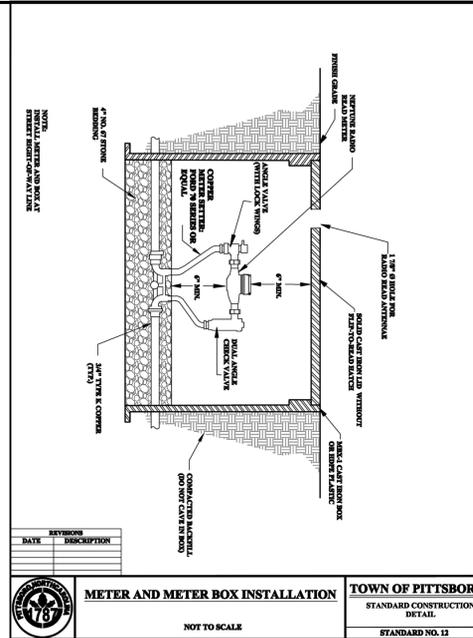

METER AND METER BOX INSTALLATION
NOT TO SCALE
TOWN OF PITTSBORO
STANDARD CONSTRUCTION DETAIL
STANDARD NO. 11

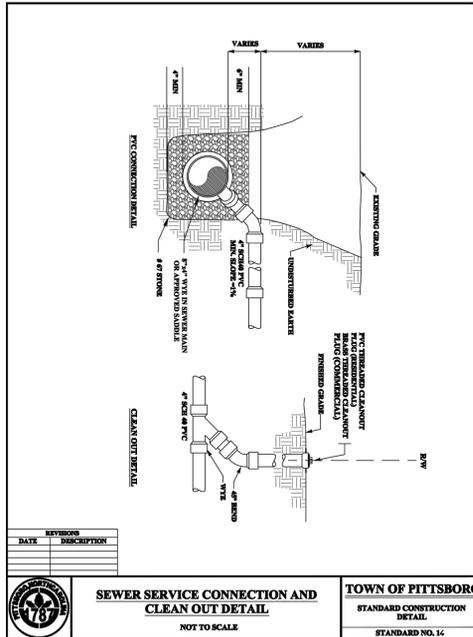

SEWER SERVICE CONNECTION AND CLEAN OUT DETAIL
NOT TO SCALE
TOWN OF PITTSBORO
STANDARD CONSTRUCTION DETAIL
STANDARD NO. 14

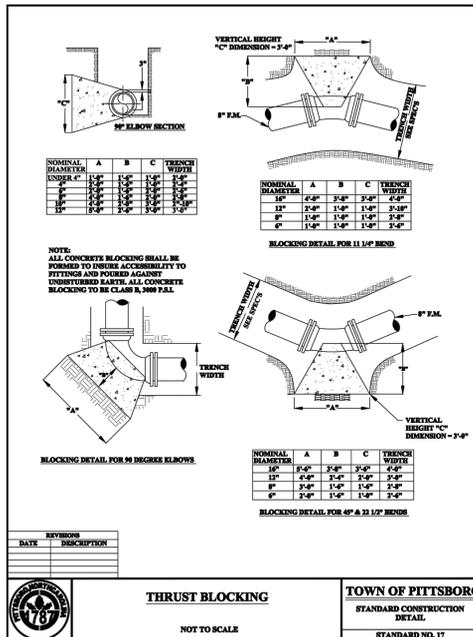


THRUST BLOCKING
NOT TO SCALE
TOWN OF PITTSBORO
STANDARD CONSTRUCTION DETAIL
STANDARD NO. 17

STOP!
BEFORE YOU DIG CALL
THE NC ONE CALL CENTER
1-800-632-4949
IT'S THE LAW!


FINAL DESIGN
NOT RELEASED
FOR CONSTRUCTION

REINFORCEMENT: H-20 Bridge Loading
CONCRETE: 4000 PSI @ 28 DAYS


Stay-Right
Precast, Inc.
P.O. Box 58659
Raleigh, NC 27658
Phone (919) 876-8600
www.stayright.com

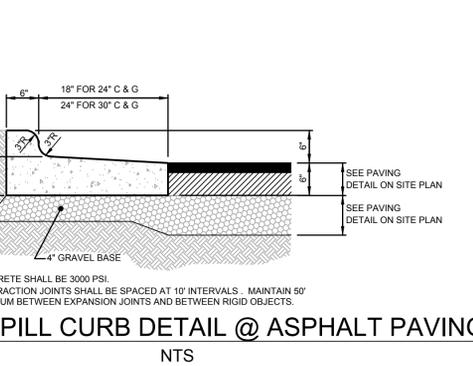


24" & 30" SPILL CURB DETAIL @ ASPHALT PAVING
NTS

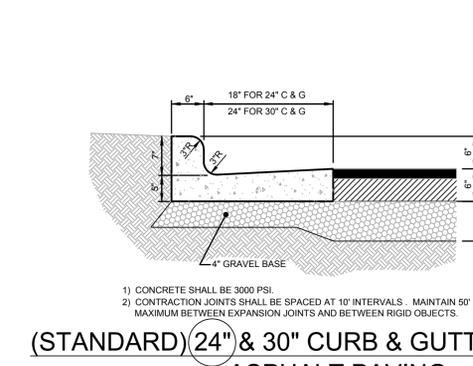


(STANDARD) 24" & 30" CURB & GUTTER DETAIL @ ASPHALT PAVING
NTS

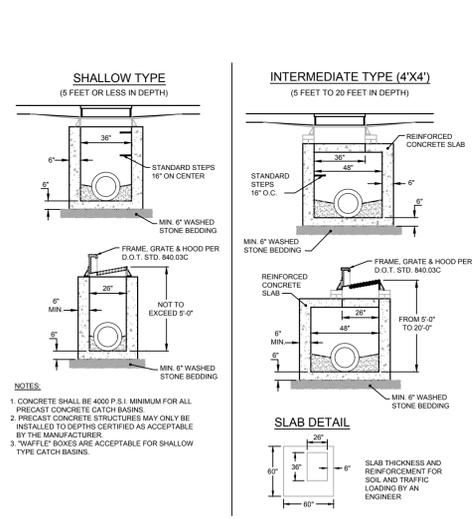

STANDARD PRECAST CONCRETE CATCH-BASIN
NTS

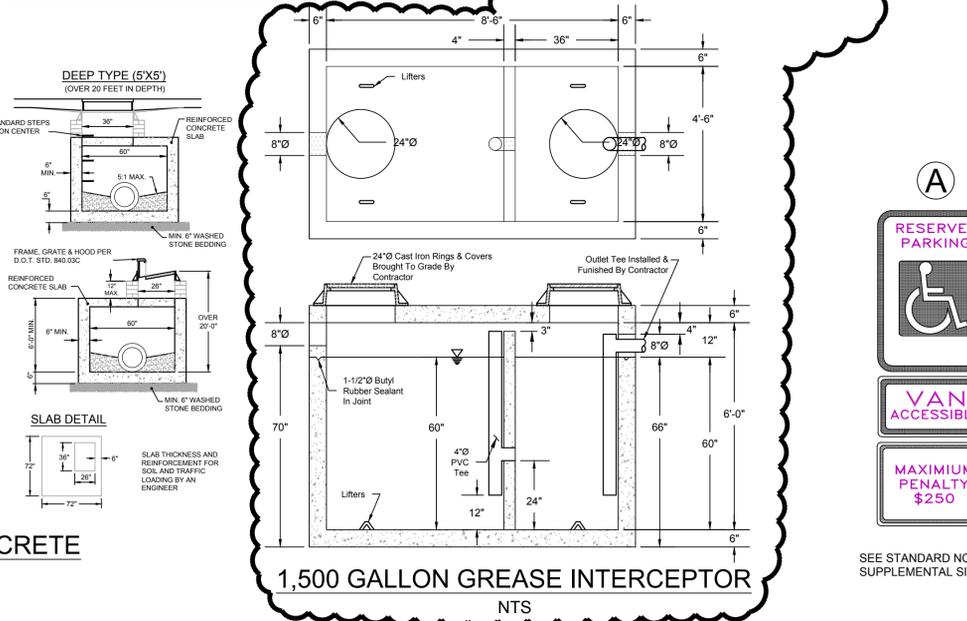

1,500 GALLON GREASE INTERCEPTOR
NTS

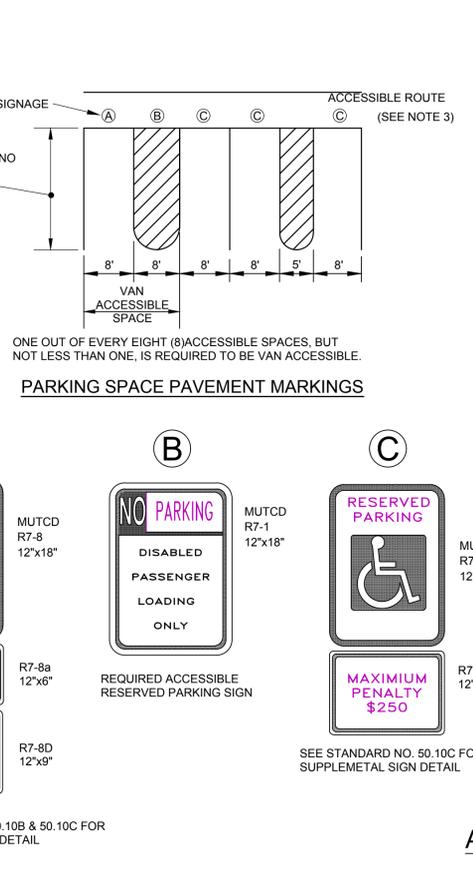

ACCESSIBLE PARKING AND SIGNAGE DETAIL
NTS

ACCESSIBLE PARKING REQUIREMENTS

TOTAL PARKING SPACES PROVIDED	MINIMUM NUMBER OF ACCESSIBLE SPACES REQUIRED	MINIMUM NUMBER OF ACCESSIBLE SPACES REQUIRED TO BE VAN ACCESSIBLE
1 TO 25	1	1
26 TO 50	2	1
51 TO 75	3	1
76 TO 100	4	1
101 TO 150	5	1
151 TO 200	6	1
201 TO 300	7	1
301 TO 400	8	1
401 TO 500	9	2
501 TO 1000	2% OF TOTAL	1 IN EVERY 8 ACCESSIBLE SPACES
1001 AND OVER	20 PLUS 1 FOR EACH 100 OVER 1000	1 IN EVERY 8 ACCESSIBLE SPACES

SECTION 4.1.2 (5) OF THE AMERICANS WITH DISABILITIES ACT (ADA).
SEE 4.1.2.5 (d) FOR MEDICAL CARE FACILITIES

NOTES:

- ALL 12"x18" ACCESSIBLE SIGNS (R7-8 & R7-1) SHALL BE MOUNTED AT 7 FEET FROM GRADE TO BOTTOM EDGE OF SIGN FACE (MUTCD). MOUNTING HEIGHT CAN BE REDUCED TO 5 FEET IF PLACED IN AN AREA BETWEEN SIDEWALK AND BUILDING FACE IN WHICH PEDESTRIANS ARE NOT EXPECTED TO USE.
- REFER TO MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, (MUTCD) U.S. DEPARTMENT OF TRANSPORTATION AND NORTH CAROLINA DEPARTMENT OF TRANSPORTATION SUPPLEMENT.
- IF ACCESSIBLE ROUTE IS A RAISED SIDEWALK AREA, THEN RAMPS ARE REQUIRED AT LOADING ZONE AREA.

NO.	REVISIONS	DATE
1.	REVISED PER TOWN COMMENTS	7/22/16
2.	REVISED PER TOWN COMMENTS	8/23/16

CE GROUP

301 GLENWOOD AVE. 220
RALEIGH, NC 27603
PHONE: 919-367-8790
FAX: 919-322-0032

www.cegroupinc.com

License # C-1739



SITE DEVELOPMENT PLANS FOR LOT 9 US 64 EAST BUSINESS PARK SITE / UTILITY DETAILS CHATHAM COUNTY, NC

Date: APRIL, 2016

Scale: -

Drawn: CPM

Checked: MPA

Project No: 127-198

Computer Dwg. Name: 127-198_Sht-09-10 Site Details

Sheet No: **10** Of 10