



BOTTOM SECTION

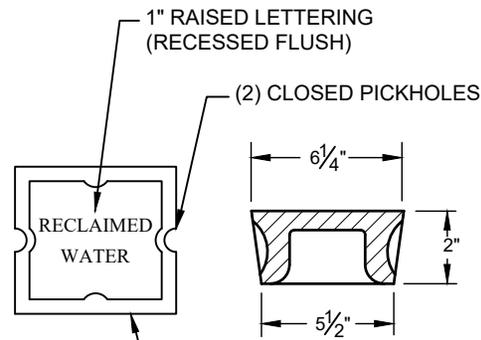

VALVE BOX COVER,
PANTONE 522 PURPLE.


LID

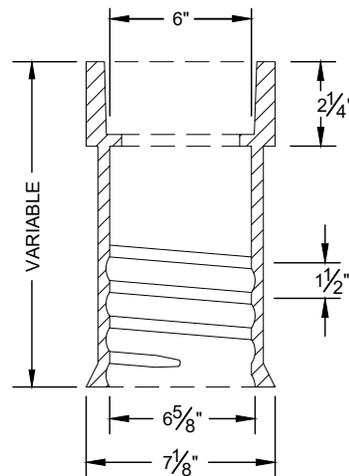

SQUARE UPPER SECTION

BOX SHALL BE CENTERED
OVER VALVE

ALL PARTS SHALL BE OF
THE SAME MATERIAL AND
SUPPLIED BY THE SAME
MANUFACTURER

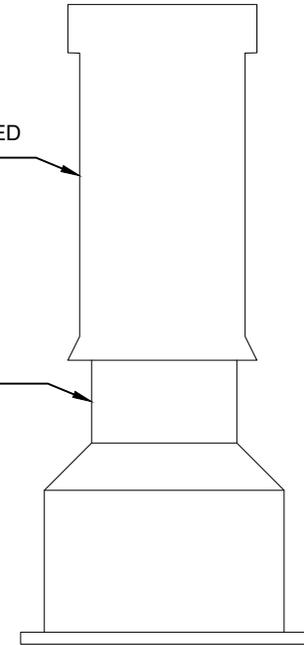

COMPLETE BOX

NOTES:

- 1) VALVE BOX COVER SHALL WEIGH A MINIMUM 13 lbs.
- 2) ENTIRE VALVE BOX ASSEMBLY & COVER SHALL BE CAST FROM CLASS 35 GRAY IRON.
- 3) ASSEMBLY SHALL BE DOMESTICALLY MADE AND MANUFACTURED IN THE U.S.A.
- 4) ASSEMBLY OTHER THAN COVER SHALL BE PAINTED BLACK.



EFFECTIVE: 10/01/16

**STANDARD VALVE BOX
(FOR RECLAIMED WATER)**

TOWN OF PITTSBORO

STANDARD CONSTRUCTION
DETAIL

STANDARD NO: RW-06-013