


SECTION VIEW

NOTES:

1. GREENWAY WIDTHS SHALL BE 6 FT, 8 FT OR 10 FT
2. TRANSVERSE EXPANSION JOINTS TO BE A MAXIMUM OF 50 FT
3. ALL CONCRETE IS TO BE FINISHED WITH CURING COMPOUND
4. SAW CUT JOINTS TO WIDTH OF TRAIL
5. CONTRACTOR IS RESPONSIBLE FOR RE-ESTABLISHING AND STABILIZATION OF SLOPES DISTURBED BY CONSTRUCTION
6. NO ABOVE GROUND UTILITIES OR UTILITY SURFACE COVERS, PLATES OR MANHOLES SHALL BE LOCATED WITHIN TRAIL AND SHALL BE MINIMUM 2 FT FROM EDGE OF TRAIL
7. RAISED MANHOLES SHALL BE MINIMUM 4 FT FROM EDGE OF TRAIL
8. ALL TRAILS SHALL BE LOCATED MINIMUM 5 FT FROM THE BACK OF CURB
9. SIDE SLOPES SHALL NOT EXCEED 3:1 UNLESS OTHERWISE APPROVED BY THE TOWN. CUT & FILL SLOPES SHALL TIE INTO EXISTING SLOPES TO CREATE AN EVEN TRANSITION

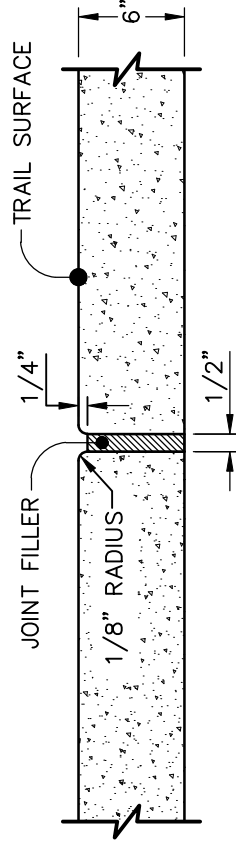

TRANSVERSE EXPANSION JOINT



EFFECTIVE: 12/13/21

STANDARD CONCRETE GREENWAY TRAIL