


STANDARD MANHOLE RING AND COVER MAY BE CAST IN SLAB OR SECURED TO TOP OVER STEPS


CONCRETE SLAB

NOTES:

1. EITHER SOLID BRICK, SOLID BLOCK, OR PRECAST CONCRETE MAY BE USED.
2. ONLY TOP AND BOTTOM STEPS REQUIRED ON BOXES INSTALLED IN THE PUBLIC RIGHT-OF-WAY.
3. USE MINIMUM 3,000 P.S.I. CONCRETE MIX FOR SLABS.
4. INSIDE DIMENSION FOR 24 INCH PIPE AND GREATER USE PIPE DIAMETER PLUS 12 INCHES.
5. WHERE DEPTH EXCEEDS 3 FEET, MANHOLE RING AND COVER TO BE LOCATED OVER STEPS.
6. LETTERING FOR MANHOLE COVER PER DETAIL.
7. PLACE SAND BAG FILLED WITH #57 STONE OVER WEEP HOLES ON EXTERIOR OF BOX.

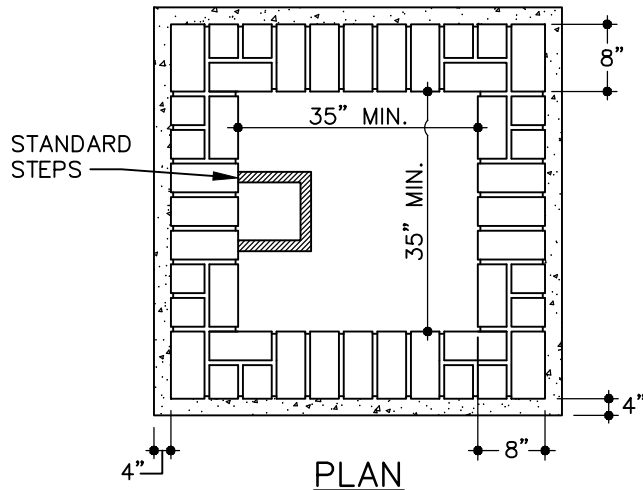

PLAN

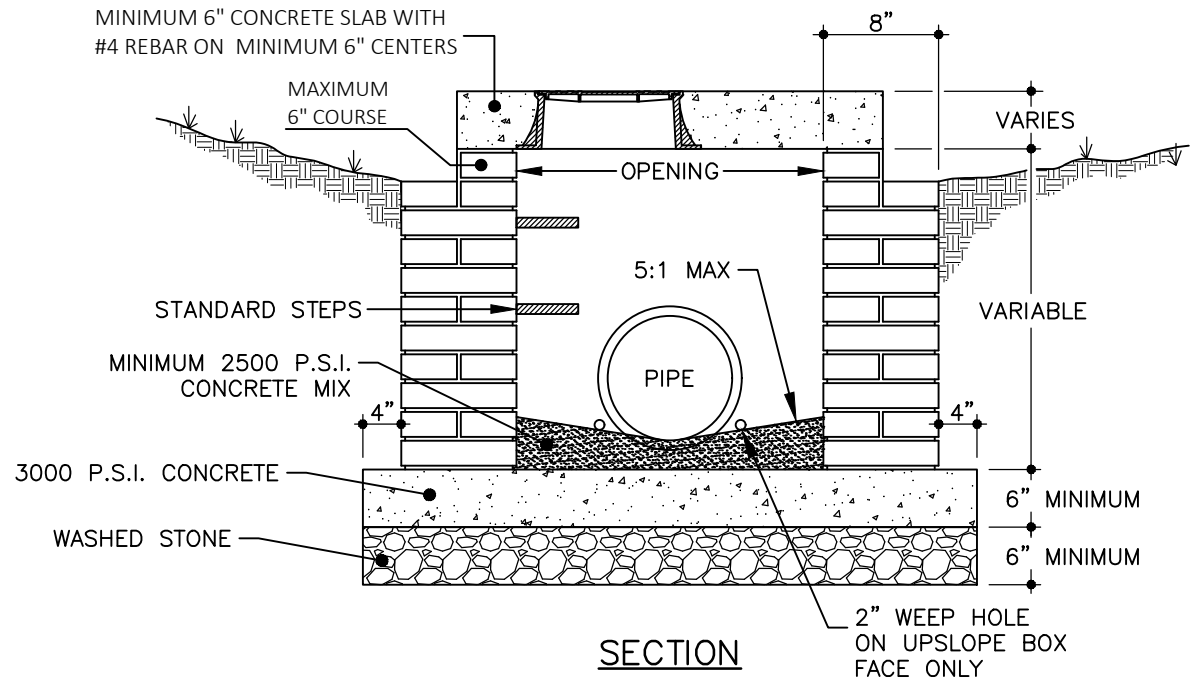

SECTION



EFFECTIVE: 11/28/22

**STANDARD YARD INLET WITH CONCRETE SLAB**

**TOWN OF PITTSBORO**

STANDARD CONSTRUCTION  
DETAIL

STANDARD NO: SD-07-001